

## NEMO

Un programma completo ideale supporto per ogni necessità illuminotecnica. Retail, Show room, Residential, Hospitality, Office, General lighting: le nostre soluzioni risolvono brillantemente ogni impiego garantendo alti standard qualitativi. Efficienze elevate con emissioni da 500 a 3500 lm. Installazioni fisse, orientabili, con basso indice UGR, trimless, IP 54; ampio range di temperature di colore: 2700K - 3000K - 4000K, tunable white. Piani ottici differenziati secondo specifici utilizzi, scelte estetiche variabili per colori e modelli. Le principali gestioni elettroniche completano la proposta.

A full range of products ideal for every lighting need. Retail, Show room, Residential, Hospitality, Office, General lighting: Nemo range can offer high colour quality (CRI>92) and Prime brand LED. Emissions from 500 to 3500 lm. Fixed installations, adjustable, low UGR index, trimless, IP54. Wide range of colour temperatures: 2700K - 3000K - 4000K and tunable white. Different Optical planes according to specific uses, variable aesthetic choices thanks to a wide range of colors and models. The main electronic managements complete our proposal.



Ampia la gamma per aspetto estetico o tecnico. La sezione "RING" ha bordo a vista. "SIMPLE" ha un bordo rastremato e permette installazioni semplificate, quasi invisibili su cartongesso. L'effetto finale è molto simile alle soluzioni trimless. La serie "EYE" offre un elevato comfort visivo. Diverse le configurazioni per lampada GU10. Non mancano versioni con grado di protezione IP54.

Our Nemo offer has been extended and provide a complete lighting solution for designers and lighting specialists. "RING" range present the visible edge, "SIMPLE" have a simplified edge almost invisible on plasterboard installation. The final effect is very close to trimless solutions. The "EYE" offer high visual comfort. Also available GU10 models as well as IP54 versions.

# NEMO\_RING



## TRIMMED

## TRIMLESS



Round



Adj



Fix



Comfort



Round



Adj



Fix



Comfort




Square - Round



Adj



Fix



Comfort



Square - Round



Adj



Fix



Comfort



Square - Square



Adj



Fix



Comfort



Square - Square



Adj



Fix



Comfort



2 Lights



Adj



Fix




Comfort



2 Lights



Adj



Fix



Comfort



3 Lights



Adj



Fix




Comfort




3 Lights



Adj



Fix




Comfort

NEMO\_Ring

Trimmed\_Adj-Fix




○ Round



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
6 W	525 lm	55 mm	62 mm	81 mm	0,14 kg	IA-ABAA ■ ▲ ● □ ▼ ::
10 W	1075 lm	75 mm	85 mm	89 mm	0,24 kg	IA-ABAB ■ ▲ ● □ ▼ ::
15 W	1510 lm	75 mm	85 mm	112 mm	0,30 kg	IA-ABBC ■ ▲ ● □ ▼ ::
24 W	2475 lm	100 mm	112 mm	140 mm	0,55 kg	IA-ACCD ■ ▲ ● □ ▼ ::
33 W	3440 lm	125 mm	140 mm	169 mm	0,95 kg	IA-ACDE ■ ▲ ● □ ▼ ::
42 W	4275 lm	150 mm	165 mm	184 mm	1,32 kg	IA-ADEF ■ ▲ ● □ ▼ ::

☑ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

◻ Square Round



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	1075 lm	92 mm	102 mm	104 mm	0,29 kg	IA-BBAB ■ ▲ ● □ ▼ ::
15 W	1510 lm	92 mm	102 mm	127 mm	0,35 kg	IA-BBBC ■ ▲ ● □ ▼ ::
24 W	2475 lm	125 mm	135 mm	161 mm	0,64 kg	IA-BCCD ■ ▲ ● □ ▼ ::
33 W	3440 lm	155 mm	165 mm	194 mm	1,10 kg	IA-BDDE ■ ▲ ● □ ▼ ::

☑ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

Accessories

Description	Minimum Recessing hole	IP	Weight	Code					
				6W	10W	15W	24W	33W	42W
Emergency kit 1 Hour	75 mm	IP20	0,43 kg	/	DRV9092	DRV9092	DRV9092	DRV9092	DRV9092
Emergency kit 3 Hours	100 mm	IP20	0,88 kg	/	/	/	DRV9091	DRV9091	DRV9091
Honeycomb grid			0,02 kg	RTL28011	RTL28012	RTL28012	RTL28013	RTL28014	RTL28015

Optical Info p. 529

\* Select your option

Version	Ring color	CCT	Optic	Reflector color	Control
Fix	White	2700 K	8°	Matt	On/Off
Adj	Black	3000 K	15°	Mirror	Phase Cut/IGBT-TRIAC
		4000 K	24°	Titanium	Push
		Tunable # ***	38°	Gold	0-1/10 V
			55° **	White	DALI **
				Matt Bronze	Casambi **
				Red	
				Yellow	


\*\* No: 6W      \*\*\* No: 42W      # Only: DALI (DT8), Casambi      \* only: 10W - 15W

NEMO\_Ring

Trimmed\_Comfort




○ Round



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	990 lm	75 mm	85 mm	107 mm	0,20 kg	IA-ABAB ■ ▲ ● □ ▼ ::
15 W	1390 lm	75 mm	85 mm	130 mm	0,27 kg	IA-ABBC ■ ▲ ● □ ▼ ::
24 W	2280 lm	100 mm	112 mm	165 mm	0,47 kg	IA-ACCD ■ ▲ ● □ ▼ ::
33 W	3165 lm	125 mm	140 mm	200 mm	0,83 kg	IA-ACDE ■ ▲ ● □ ▼ ::
42 W	3930 lm	150 mm	165 mm	229 mm	1,13 kg	IA-ADEF ■ ▲ ● □ ▼ ::

☑ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

◻ Square Round



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	990 lm	92 mm	102 mm	120 mm	0,25 kg	IA-BBAB ■ ▲ ● □ ▼ ::
15 W	1390 lm	92 mm	102 mm	147 mm	0,32 kg	IA-BBBC ■ ▲ ● □ ▼ ::
24 W	2280 lm	125 mm	135 mm	185 mm	0,55 kg	IA-BCCD ■ ▲ ● □ ▼ ::
33 W	3165 lm	155 mm	165 mm	230 mm	0,98 kg	IA-BDDE ■ ▲ ● □ ▼ ::

☑ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3 Valori  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

Accessories

Description	Minimum Recessing hole	IP	Weight	Code					
				/	10W	15W	24W	33W	42W
Emergency kit 1 Hour	75 mm	IP20	0,43 kg	/	DRV9092	DRV9092	DRV9092	DRV9092	DRV9092
Emergency kit 3 Hours	100 mm	IP20	0,88 kg	/	/	/	DRV9091	DRV9091	DRV9091
Honeycomb grid			0,02 kg	/	RTL28012	RTL28012	RTL28013	RTL28014	RTL28015

Optical Info p. 529

\* Select your option

Version	Ring color	CCT	Optic	Reflector color	Control
Comfort	White	2700 K	8°	White	On/Off
	Black	3000 K	15°	Matt Silver	Phase Cut/IGBT-TRIAC
		4000 K	24°	Matt Black	Push
		Tunable *** #	38°	Matt Bronze	0-1/10 V
			55°	Red	DALI
				Yellow	Casambi


\*\*\* No: 42W      # Only: DALI (DT8), Casambi      \* only: 10W - 15W

NEMO\_Ring



Trimmed\_Comfort

□ Square Square



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	990 lm	75 mm	85 mm	107 mm	0,21 kg	IA-EBAB ■ ▲ ● □ ▼ ❖
15 W	1390 lm	75 mm	85 mm	130 mm	0,27 kg	IA-EBBC ■ ▲ ● □ ▼ ❖
24 W	2280 lm	100 mm	112 mm	165 mm	0,49 kg	IA-ECCD ■ ▲ ● □ ▼ ❖
33 W	3165 lm	125 mm	140 mm	200 mm	0,87 kg	IA-ECDE ■ ▲ ● □ ▼ ❖
42 W	3930 lm	150 mm	165 mm	229 mm	1,14 kg	IA-EDEF ■ ▲ ● □ ▼ ❖

☑ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

Accessories

Description	Minimum Recessing hole	IP	Weight	Code					
				/	10W	15W	24W	33W	42W
Emergency kit 1 Hour	75 mm	IP20	0,43 kg	/	DRV9092	DRV9092	DRV9092	DRV9092	DRV9092
Emergency kit 3 Hours	100 mm	IP20	0,88 kg	/	/	/	DRV9091	DRV9091	DRV9091
Honeycomb grid				/	RTL28012	RTL28012	RTL28013	RTL28014	RTL28015

Optical Info p. 529

\* Select your option

Version	Ring color	CCT	Optic	Reflector color	Control
Comfort C	White W	2700 K 1	8° • 5	White E	On/Off NF
	Black B	3000 K 2	15° 1	Matt Silver F	Phase Cut/IGBT-TRIAC • PC
		4000 K 3	24° 2	Matt Black G	Push PU
		Tunable *** # 4	38° 3	Matt Bronze H	0-1/10 V AN
			55° 4	Red I	DALI DA
				Yellow L	Casambi CA

\*\*\* No: 42W

# Only: DALI (DT8), Casambi

• only: 10W - 15W




HIGH VISUAL COMFORT

NEMO\_Ring

Trimmed\_Adj-Fix




2 Lights



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
2x 10 W	2150 lm	92x180 mm	102x192 mm	104 mm	0,54 kg	IA-CDCG ■ ▲ ● □ ▼ ⚡
2x 15 W	3020 lm	92x180 mm	102x192 mm	127 mm	0,67 kg	IA-CDDI ■ ▲ ● □ ▼ ⚡

☑ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

3 Lights

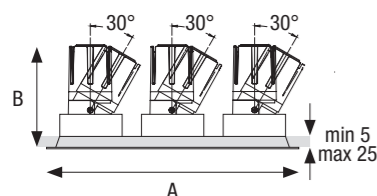

Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
3x 10 W	3230 lm	92x270 mm	102x282 mm	104 mm	0,79 kg	IA-DEDH ■ ▲ ● □ ▼ ⚡
3x 15 W	4525 lm	92x270 mm	102x282 mm	127 mm	0,98 kg	IA-DEEL ■ ▲ ● □ ▼ ⚡

☑ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

Accessories

Description	Minimum Recessing hole	IP	Weight	Code					
				10W	15W	/	/	/	/
Emergency kit 1 Hour	75 mm	IP20	0,43 kg	DRV9092	DRV9092	/	/	/	/
Emergency kit 3 Hours	100 mm	IP20	0,88 kg	/	/	/	/	/	/
Honeycomb grid			0,02 kg	RTL28012	RTL28012	/	/	/	/

Il numero di accessori varia in base al numero di moduli luminosi.  
The number of accessories to be ordered varies according to the number of light modules.

Optical Info p. 529

\* Select your option

Version	Ring color	CCT	Optic	Reflector color	Control
Fix	White	2700 K	8°	Matt	On/Off
Adj	Black	3000 K	15°	Mirror	Phase Cut/IGBT-TRIAC
		4000 K	24°	Titanium	Push
		Tunable #	38°	Gold	0-1/10 V
			55°	White	DALI
				Matt Bronze	Casambi
				Red	
				Yellow	


# Only: DALI (DT8), Casambi

NEMO\_Ring

Trimmed\_Comfort




2 Lights



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
2x 10 W	1980 lm	92x180 mm	102x192 mm	120 mm	0,47 kg	IA-CDCG ■ ▲ ● □ ▼ ⚡
2x 15 W	2775 lm	92x180 mm	102x192 mm	147 mm	0,60 kg	IA-CDDI ■ ▲ ● □ ▼ ⚡

☑ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

3 Lights

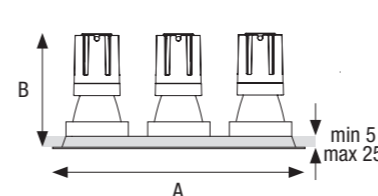

Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
3x 10 W	2970 lm	92x270 mm	102x282 mm	120 mm	0,69 kg	IA-DEDH ■ ▲ ● □ ▼ ⚡
3x 15 W	4165 lm	92x270 mm	102x282 mm	147 mm	0,88 kg	IA-DEEL ■ ▲ ● □ ▼ ⚡

☑ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

Accessories

Description	Minimum Recessing hole	IP	Weight	Code					
				10W	15W	/	/	/	/
Emergency kit 1 Hour	75 mm	IP20	0,43 kg	DRV9092	DRV9092	/	/	/	/
Emergency kit 3 Hours	100 mm	IP20	0,88 kg	/	/	/	/	/	/
Honeycomb grid			0,02 kg	RTL28012	RTL28012	/	/	/	/

Il numero di accessori varia in base al numero di moduli luminosi.  
The number of accessories to be ordered varies according to the number of light modules.

Optical Info p. 529

\* Select your option

Version	Ring color	CCT	Optic	Reflector color	Control
Comfort	White	2700 K	8°	White	On/Off
	Black	3000 K	15°	Matt Silver	Phase Cut/IGBT-TRIAC
		4000 K	24°	Matt Black	Push
		Tunable #	38°	Matt Bronze	0-1/10 V
			55°	Red	DALI
				Yellow	Casambi


# Only: DALI (DT8), Casambi

NEMO\_Ring

Trimless\_Adj-Fix




Round



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
6 W	525 lm	55 mm	85 mm	81 mm	0,14 kg	IB-ABAA ■ ▲ ● □ ▼ ::
10 W	1075 lm	75 mm	110 mm	89 mm	0,24 kg	IB-ABAB ■ ▲ ● □ ▼ ::
15 W	1510 lm	75 mm	110 mm	112 mm	0,31 kg	IB-ABBC ■ ▲ ● □ ▼ ::
24 W	2475 lm	100 mm	150 mm	140 mm	0,55 kg	IB-ACCD ■ ▲ ● □ ▼ ::
33 W	3440 lm	125 mm	202 mm	169 mm	0,97 kg	IB-ACDE ■ ▲ ● □ ▼ ::
42 W	4275 lm	150 mm	232 mm	184 mm	1,32 kg	IB-ADEF ■ ▲ ● □ ▼ ::

☑ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

Square



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	1075 lm	85 mm	120 mm	104 mm	0,28 kg	IB-BBAB ■ ▲ ● □ ▼ ::
15 W	1510 lm	85 mm	120 mm	127 mm	0,34 kg	IB-BBBC ■ ▲ ● □ ▼ ::

☑ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

Accessories

Description	Minimum Recessing hole	IP	Weight	Code					
				6W	10W	15W	24W	33W	42W
Emergency kit 1 Hour	75 mm	IP20	0,43 kg	/	DRV9092	DRV9092	DRV9092	DRV9092	DRV9092
Emergency kit 3 Hours	100 mm	IP20	0,88 kg	/	/	/	DRV9091	DRV9091	DRV9091
Honeycomb grid			0,02 kg	RTL28011	RTL28012	RTL28012	RTL28013	RTL28014	RTL28015

Optical Info p. 529

\* Select your option

Version	Ring color	CCT	Optic	Reflector color	Control
Fix	A	2700 K	8° •	Matt	On/Off
Adj	B	3000 K	15°	Mirror	Phase Cut/IGBT-TRIAC*
		4000 K	24°	Titanium	Push
		Tunable # **	38°	Gold	0-1/10 V
			55° **	White	DALI **
				Matt Bronze	Casambi **
				Red	
				Yellow	


\*\* No: 6W      \*\*\* No: 42W      # Only: DALI (DT8), Casambi      • only: 10W - 15W

NEMO\_Ring

Trimless\_Comfort




Round



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	990 lm	75 mm	110 mm	107 mm	0,21 kg	IB-ABAB ■ ▲ ● □ ▼ ::
15 W	1390 lm	75 mm	110 mm	130 mm	0,28 kg	IB-ABBC ■ ▲ ● □ ▼ ::
24 W	2280 lm	100 mm	150 mm	165 mm	0,47 kg	IB-ACCD ■ ▲ ● □ ▼ ::
33 W	3165 lm	125 mm	202 mm	200 mm	0,85 kg	IB-ACDE ■ ▲ ● □ ▼ ::
42 W	3930 lm	150 mm	232 mm	229 mm	1,14 kg	IB-ADEF ■ ▲ ● □ ▼ ::

☑ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

Square



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	990 lm	85 mm	120 mm	128 mm	0,24 kg	IB-BBAB ■ ▲ ● □ ▼ ::
15 W	1390 lm	85 mm	120 mm	150 mm	0,31 kg	IB-BBBC ■ ▲ ● □ ▼ ::

☑ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

Accessories

Description	Minimum Recessing hole	IP	Weight	Code					
				/	10W	15W	24W	33W	42W
Emergency kit 1 Hour	75 mm	IP20	0,43 kg	/	DRV9092	DRV9092	DRV9092	DRV9092	DRV9092
Emergency kit 3 Hours	100 mm	IP20	0,88 kg	/	/	/	DRV9091	DRV9091	DRV9091
Honeycomb grid			0,02 kg	/	RTL28012	RTL28012	RTL28013	RTL28014	RTL28015

Optical Info p. 529

\* Select your option

Version	Ring color	CCT	Optic	Reflector color	Control
Comfort	C	2700 K	8° •	White	On/Off
		3000 K	15°	Matt Silver	Phase Cut/IGBT-TRIAC*
		4000 K	24°	Matt Black	Push
		Tunable # ***	38°	Matt Bronze	0-1/10 V
			55°	Red	DALI
				Yellow	Casambi


\*\*\* No: 42W      # Only: DALI (DT8), Casambi      • only: 10W - 15W

NEMO\_Ring

Trimless\_Adj-Fix




2 Lights



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete		
			A	B				
2x 10 W	2150 lm	90x180 mm	120x210 mm	104 mm	0,53 kg	IB-CDCG	■ ▲ ● □ ▼ ❖	
2x 15 W	3020 lm	90x180 mm	120x210 mm	127 mm	0,66 kg	IB-CDDI	■ ▲ ● □ ▼ ❖	

☑ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

3 Lights

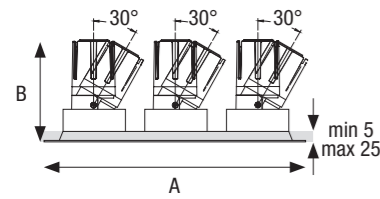

Power	Lumen output	Hole size	Product dimension		Weight	*code to complete		
			A	B				
3x 10 W	3230 lm	90x270 mm	120x300 mm	104 mm	0,78 kg	IB-DEDH	■ ▲ ● □ ▼ ❖	
3x 15 W	4525 lm	90x270 mm	120x300 mm	127 mm	0,98 kg	IB-DEEL	■ ▲ ● □ ▼ ❖	

☑ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

Accessories

Description	Minimum	IP	Weight	Code					
	Recessing hole			/	10W	15W	/	/	/
Emergency kit 1 Hour	75 mm	IP20	0,43 kg	/	DRV9092	DRV9092	/	/	/
Emergency kit 3 Hours	100 mm	IP20	0,88 kg	/	/	/	/	/	/
Honeycomb grid			0,02 kg	/	RTL28012	RTL28012	/	/	/

Il numero di accessori varia in base al numero di moduli luminosi.  
The number of accessories to be ordered varies according to the number of light modules.

Optical Info p. 529

\* Select your option

Version	Ring color	CCT	Optic	Reflector color	Control
Fix	White	2700 K	8°	Matt	On/Off
Adj		3000 K	15°	Mirror	Phase Cut/IGBT-TRIAC
		4000 K	24°	Titanium	Push
		Tunable #	38°	Gold	0-1/10 V
			55°	White	DALI
				Matt Bronze	Casambi
				Red	
				Yellow	


# Only: DALI (DT8), Casambi

NEMO\_Ring

Trimless\_Comfort




2 Lights



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete		
			A	B				
2x 10 W	1980 lm	90x180 mm	120x210 mm	128 mm	0,46 kg	IB-CDCG	■ ▲ ● □ ▼ ❖	
3x 15 W	2775 lm	90x180 mm	120x210 mm	150 mm	0,59 kg	IB-CDDI	■ ▲ ● □ ▼ ❖	

☑ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

3 Lights

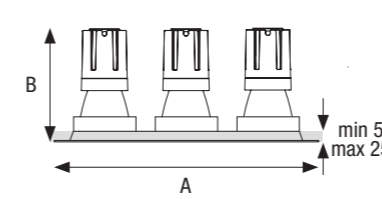

Power	Lumen output	Hole size	Product dimension		Weight	*code to complete		
			A	B				
3x 10 W	2970 lm	90x270 mm	120x300 mm	128 mm	0,68 kg	IB-DEDH	■ ▲ ● □ ▼ ❖	
3x 15 W	4165 lm	90x270 mm	120x300 mm	150 mm	0,88 kg	IB-DEEL	■ ▲ ● □ ▼ ❖	

☑ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

Accessories

Description	Minimum	IP	Weight	Code					
	Recessing hole			/	10W	15W	/	/	/
Emergency kit 1 Hour	75 mm	IP20	0,43 kg	/	DRV9092	DRV9092	/	/	/
Emergency kit 3 Hours	100 mm	IP20	0,88 kg	/	/	/	/	/	/
Honeycomb grid			0,02 kg	/	RTL28012	RTL28012	/	/	/


Il numero di accessori varia in base al numero di moduli luminosi.  
The number of accessories to be ordered varies according to the number of light modules.

Optical Info p. 529

\* Select your option

Version	Ring color	CCT	Optic	Reflector color	Control
Comfort	White	2700 K	8°	White	On/Off
		3000 K	15°	Matt Silver	Phase Cut/IGBT-TRIAC
		4000 K	24°	Matt Black	Push
		Tunable #	38°	Matt Bronze	0-1/10 V
			55°	Red	DALI
				Yellow	Casambi

# Only: DALI (DT8), Casambi

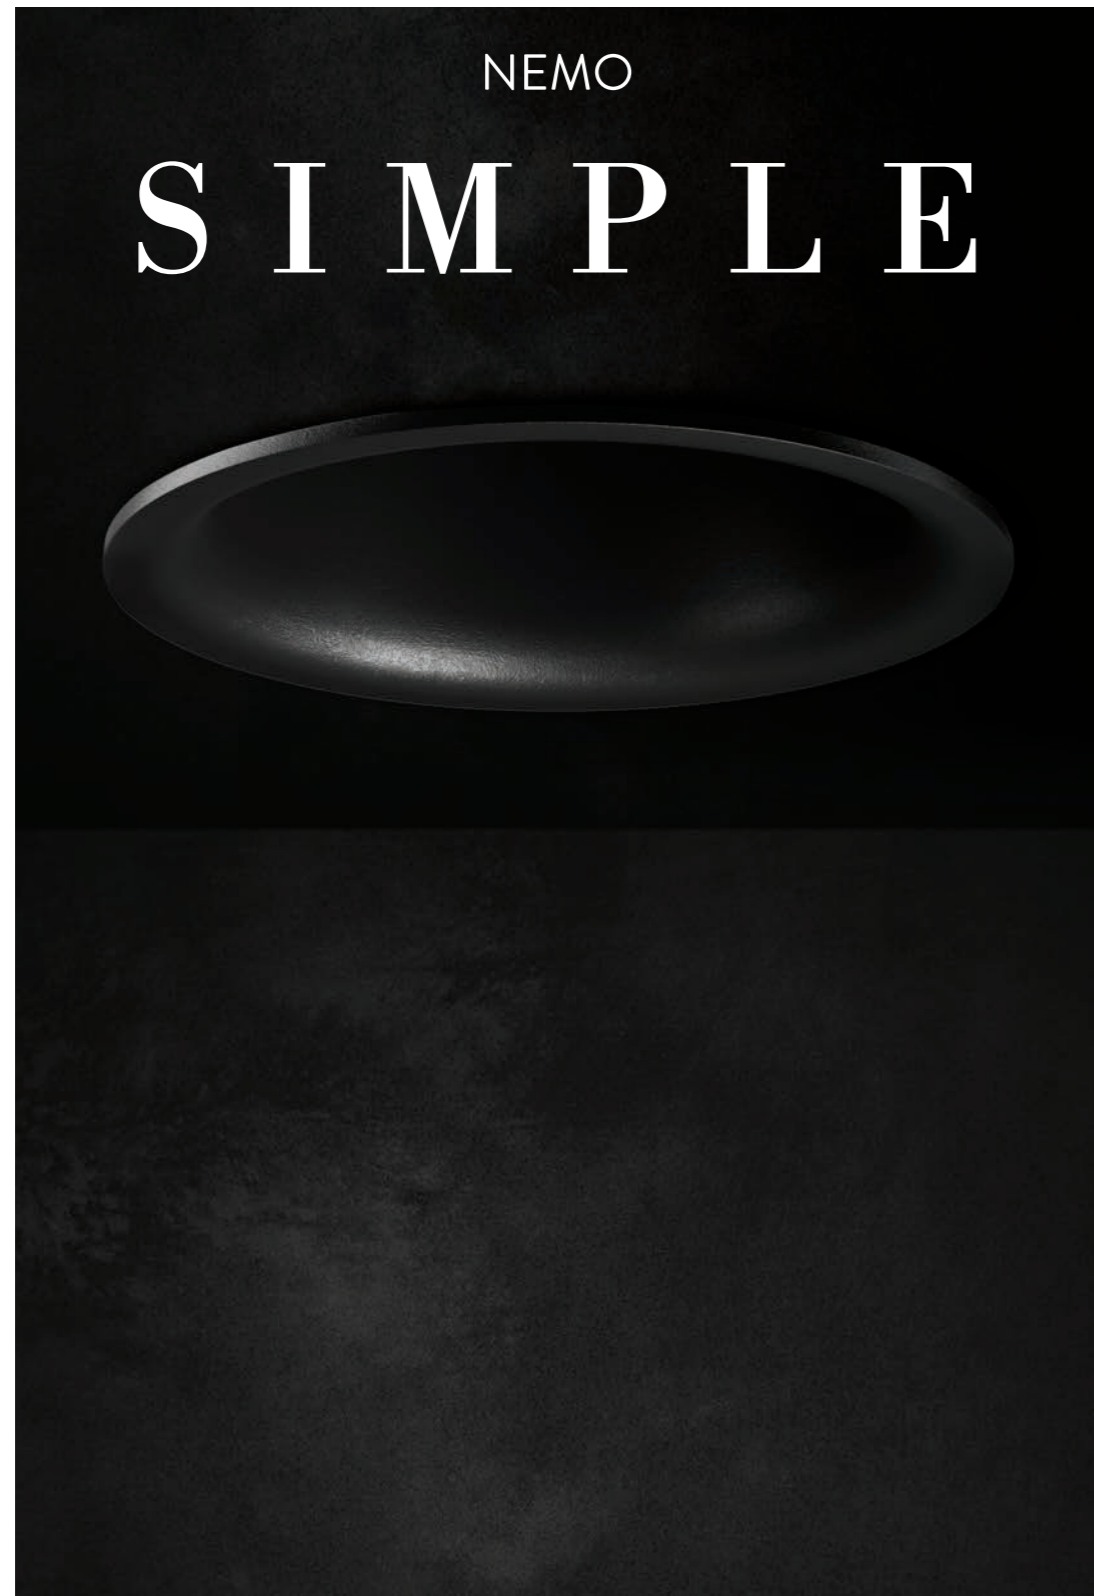

## NEMO\_SIMPLE



### TRIMMED



Round




Asymmetric




Fix



Square - Round



Asymmetric



Fix




# NEMO\_Simple



## Trimmed\_Fix


### Round



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	1020 lm	75 mm	84 mm	92 mm	0,21 kg	LA-ABAB ■ ▲ ● □ ::
15 W	1435 lm	75 mm	84 mm	117 mm	0,28 kg	LA-ABBC ■ ▲ ● □ ::
24 W	2350 lm	100 mm	110 mm	146 mm	0,49 kg	LA-ACCD ■ ▲ ● □ ::
33 W	3270 lm	125 mm	138 mm	180 mm	0,87 kg	LA-ACDE ■ ▲ ● □ ::
42 W	4060 lm	150 mm	164 mm	210 mm	1,23 kg	LA-ADEF ■ ▲ ● □ ::

□ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

### Square



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	1020 lm	75 mm	88 mm	77 mm	0,23 kg	LA-BBAB ■ ▲ ● □ ::
15 W	1435 lm	75 mm	88 mm	102 mm	0,30 kg	LA-BBBC ■ ▲ ● □ ::

□ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

## Accessories

Description	Minimum Recessing hole	IP	Weight	Code					
				/	10W	15W	24W	33W	42W
Emergency kit 1 Hour	75 mm	IP20	0,43 kg	/	DRV9092	DRV9092	DRV9092	DRV9092	DRV9092
Emergency kit 3 Hours	100 mm	IP20	0,88 kg	/	/	/	DRV9091	DRV9091	DRV9091
Honeycomb grid			0,02 kg	/	RTL28012	RTL28012	RTL28013	RTL28014	RTL28015

Optical Info p. 529

### \* Select your option

Version	Ring color	CCT	Optic	Control
Fix	White Black	2700 K 3000 K 4000 K Tunable # ***	8° 15° 24° 38° 55°	On/Off Phase Cut/IGBT-TRIAC* Push 0-1/10 V DALI Casambi

\*\*\* No: 42W

# Only: DALI (DT8), Casambi


\* only: 10W - 15W

# NEMO\_Simple



## Trimmed\_Asymmetric


### Round



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	970 lm	75 mm	88 mm	92 mm	0,24 kg	LA-ABAB ■ ▲ ● □ ::
15 W	1360 lm	75 mm	88 mm	117 mm	0,31 kg	LA-ABBC ■ ▲ ● □ ::

□ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

### Square



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	970 lm	75 mm	88 mm	80 mm	0,23 kg	LA-BBAB ■ ▲ ● □ ::
15 W	1360 lm	75 mm	88 mm	102 mm	0,31 kg	LA-BBBC ■ ▲ ● □ ::

□ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

## Accessories


Description	Minimum Recessing hole	IP	Weight	Code					
				/	10W	15W	/	/	/
Emergency kit 1 Hour	75 mm	IP20	0,43 kg	/	DRV9092	DRV9092	/	/	/
Emergency kit 3 Hours	100 mm	IP20	0,88 kg	/	/	/	/	/	/
Honeycomb grid			0,02 kg	/	RTL28012	RTL28012	/	/	/

Optical Info p. 530

### \* Select your option

Version	Ring color	CCT	Optic	Control
Asymmetric	White Black	2700 K 3000 K 4000 K Tunable #	8° 15° 24° 38° 55°	On/Off Phase Cut/IGBT-TRIAC* Push 0-1/10 V DALI Casambi

# Only: DALI (DT8), Casambi

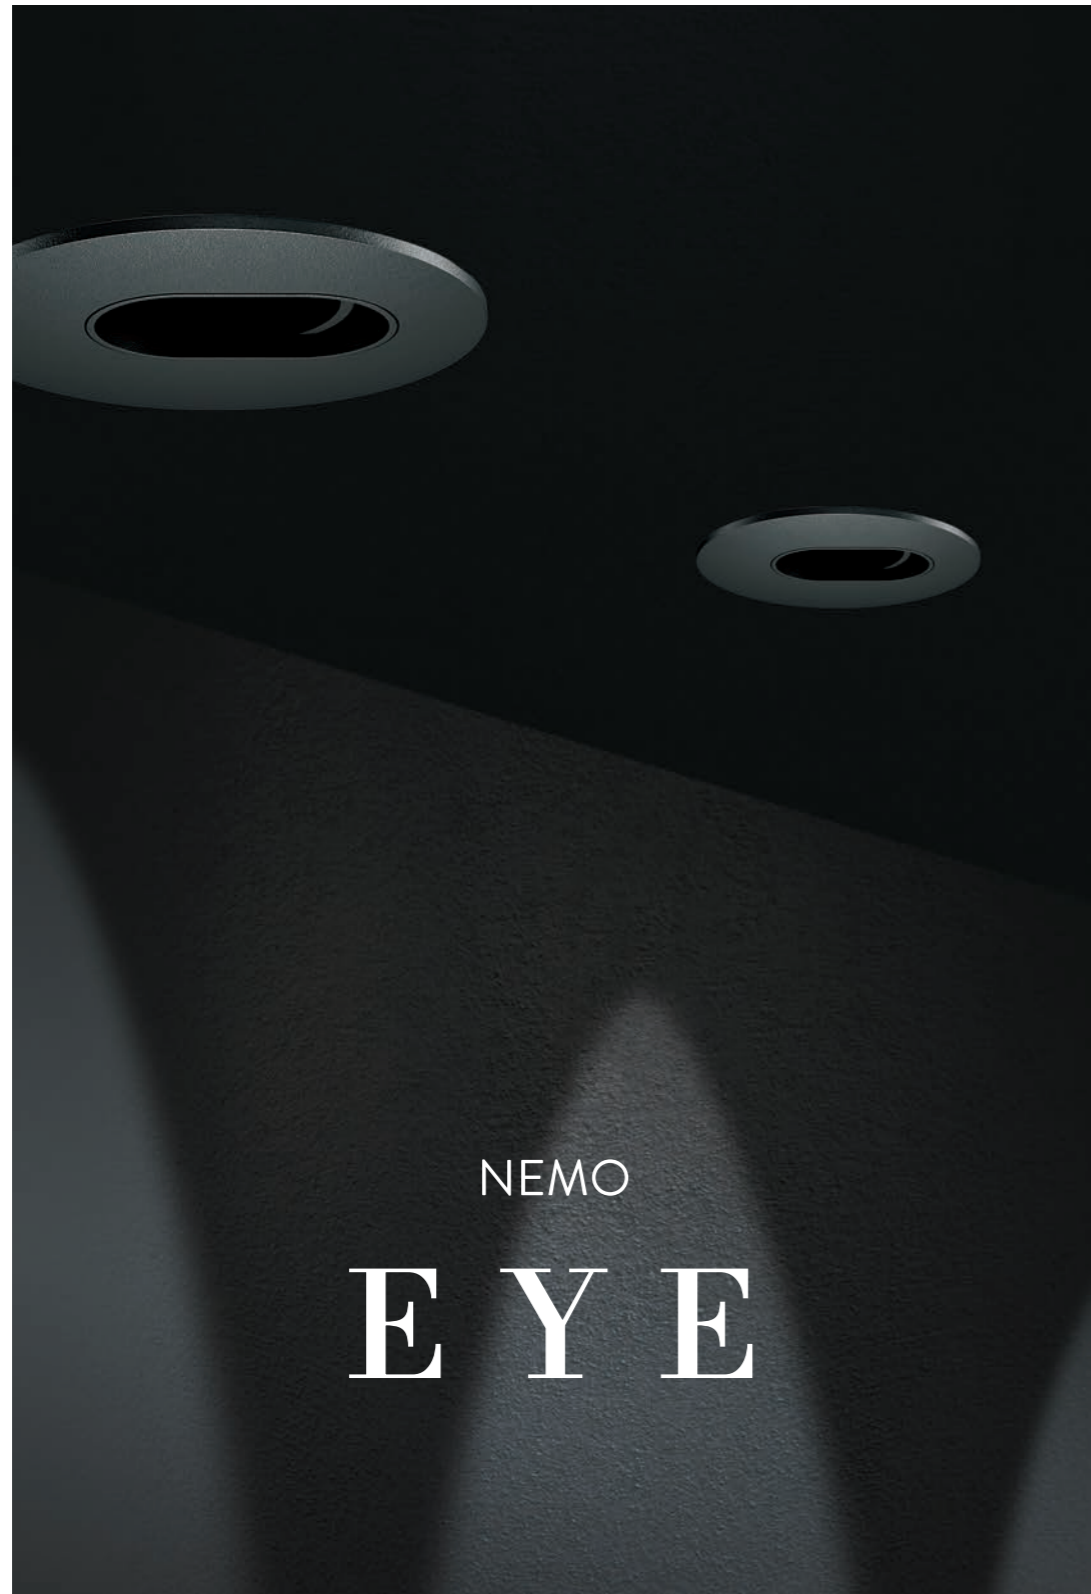

# NEMO\_EYE



## TRIMMED



Round



Adj



Fix



Square - Round



Adj




Fix

NEMO\_Eye



Trimmed\_Adj-Fix


○ Round



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
6 W	525 lm	55 mm	65 mm	80 mm	0,14 kg	MA-ABAA ■ ▲ ● □ ☼
10 W	1075 lm	65 mm	75 mm	83 mm	0,23 kg	MA-ABAB ■ ▲ ● □ ☼
15 W	1510 lm	65 mm	75 mm	106 mm	0,29 kg	MA-ABBC ■ ▲ ● □ ☼

☑ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

◼ Square



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	1075 lm	65 mm	75 mm	83 mm	0,23 kg	MA-BBAB ■ ▲ ● □ ☼
15 W	1510 lm	65 mm	75 mm	106 mm	0,30 kg	MA-BBBC ■ ▲ ● □ ☼

☑ 220÷240Vac | IP40down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

Accessories

Description	Minimum Recessing hole	IP	Weight	Code					
				6W	10W	15W	/	/	/
Emergency kit 1 Hour	75 mm	IP20	0,43 kg	/	DRV9092	DRV9092	/	/	/
Emergency kit 3 Hours	100 mm	IP20	0,88 kg	/	/	/	/	/	/

Optical Info p. 530


\* Select your option

Version	Ring color	CCT	Optic	Control
Fix A	White W	2700 K 1	8° 5	On/Off NF
Adj B		3000 K 2	15° 1	Phase Cut/IGBT-TRIAC* PC
		4000 K 3	24° 2	Push PU
		Tunable #** 4	38° 3	0-1/10 V AN
			55°** 4	DALI** DA
				Casambi** CA

\*\* No: 6W

# Only: DALI (DT8), Casambi

• only: 10W - 15W

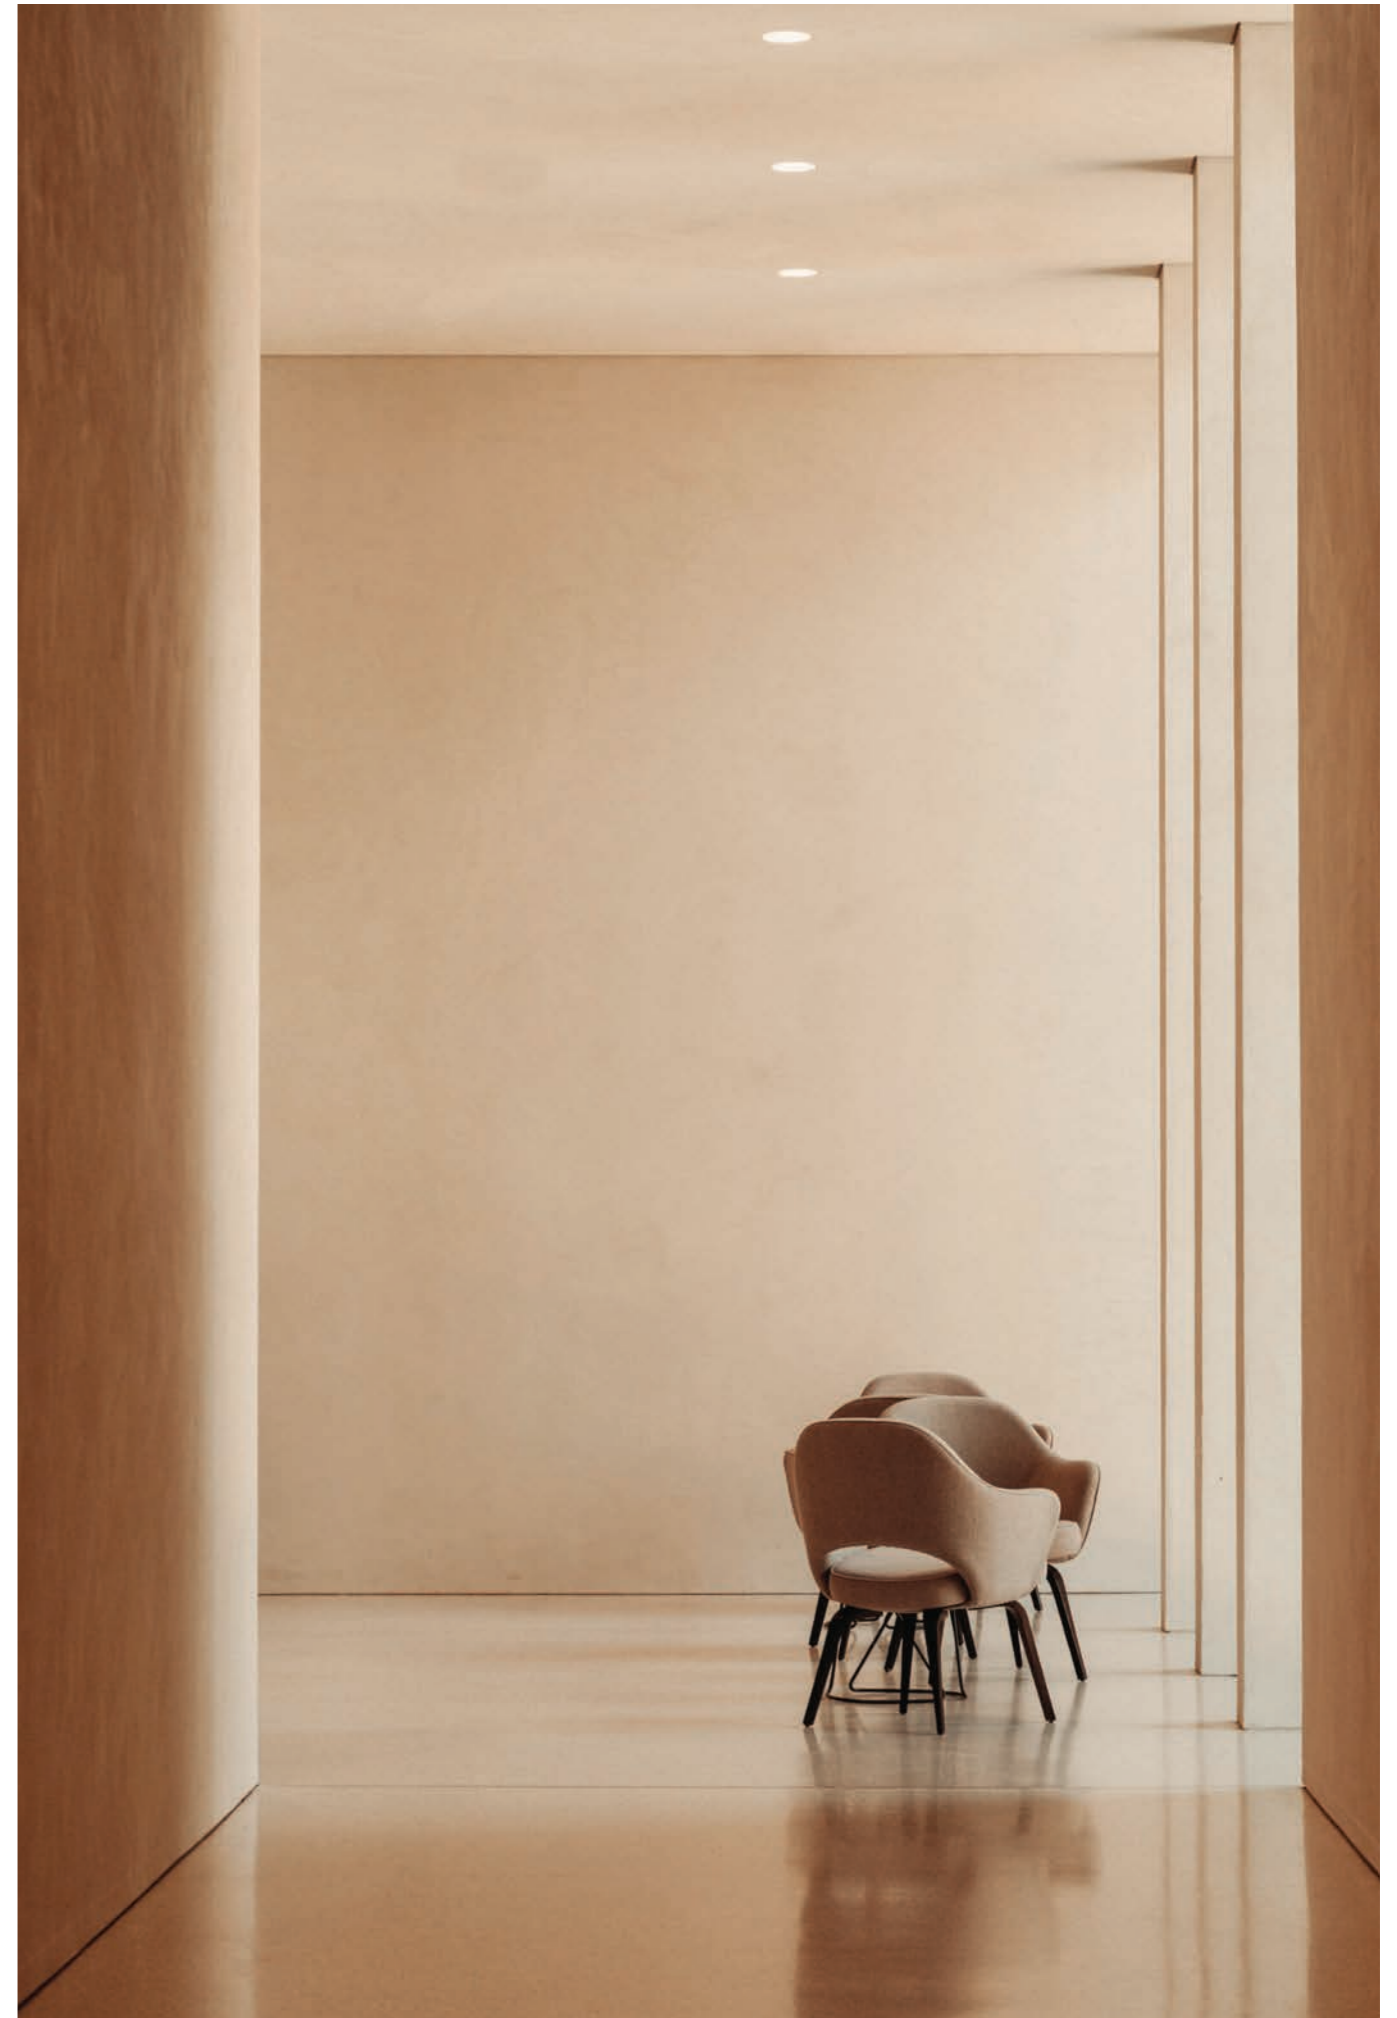



# NEMO\_IP54

## TRIMMED



Round



Fix



Square - Round



Fix




NEMO\_IP54



Trimmed\_Fix


○ Round



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	915 lm	75 mm	88 mm	85 mm	0,27 kg	NA-ABAB ■ ▲ ● □ ❖
15 W	1285 lm	75 mm	88 mm	108 mm	0,34 kg	NA-ABBC ■ ▲ ● □ ❖

□ 220÷240Vac | IP54down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

■ Square



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	915 lm	75 mm	90 mm	70 mm	0,28 kg	NA-BBAB ■ ▲ ● □ ❖
15 W	1285 lm	75 mm	90 mm	95 mm	0,34 kg	NA-BBBC ■ ▲ ● □ ❖

□ 220÷240Vac | IP54down - IP20up      UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
Lumen output values: luminaire luminous flux at 4000 K - optics 24°

Accessories


Description	Minimum Recessing hole	IP	Weight	Code			/	/	/
				6W	10W	15W			
Emergency kit 1 Hour	75 mm	IP20	0,43 kg	/	DRV9092	DRV9092	/	/	/
Emergency kit 3 Hours	100 mm	IP20	0,88 kg	/	/	/	/	/	/
Honeycomb grid			0,02 kg	/	/	/	/	/	/

Optical Info p. 529

\* Select your option

Version	Ring color	CCT	Optic	Control
Fix	White	2700 K	15°	On/Off
A	W	3000 K	24°	Phase Cut/IGBT-TRIAC
		4000 K	38°	Push
		Tunable #	55°	0-1/10 V
				DALI
				Casambi

# Only: DALI (DT8), Casambi

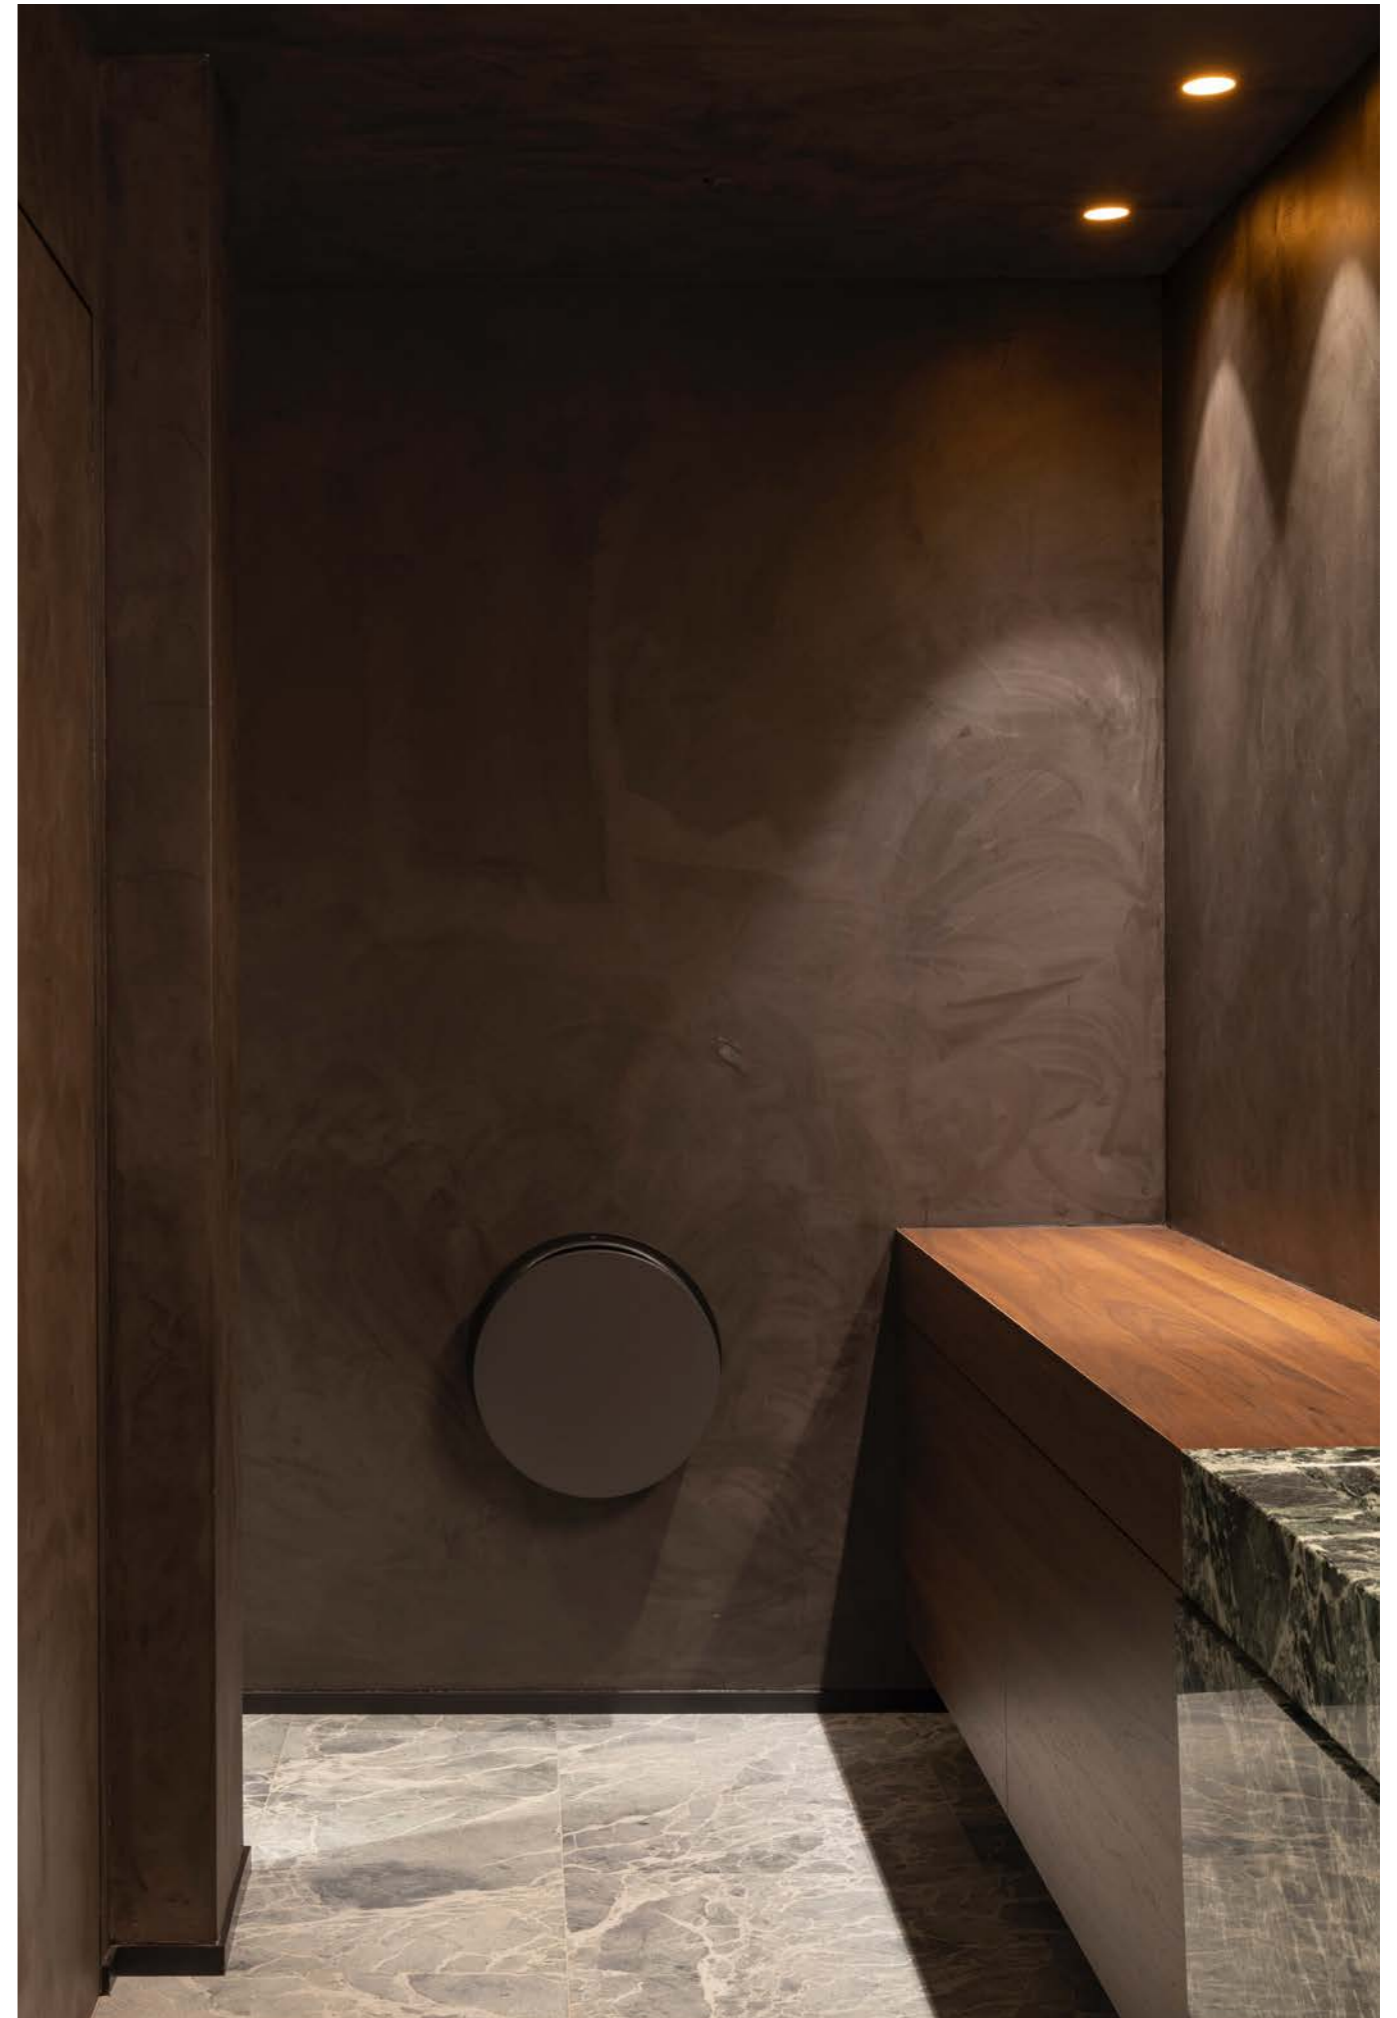

N E M O

UNA GAMMA COMPLETA,  
TECNOLOGICAMENTE  
AVANZATA, ADATTA AD OGNI  
NECESSITÀ ILLUMINOTECNICA.


A COMPLETE  
TECHNOLOGICALLY  
ADVANCED RANGE, SUITABLE  
FOR ALL LIGHTING NEEDS.



# 185.000 CODES

Una profondità di gamma infinita, affidabilità totale, rapidità di servizio, assistenza; queste le chiavi del successo della nostra proposta. In assortimento anche versioni IP65.

An extensive product range, total reliability, fast service, and support—these are the keys to the success of our offering. The range also includes IP65 versions.

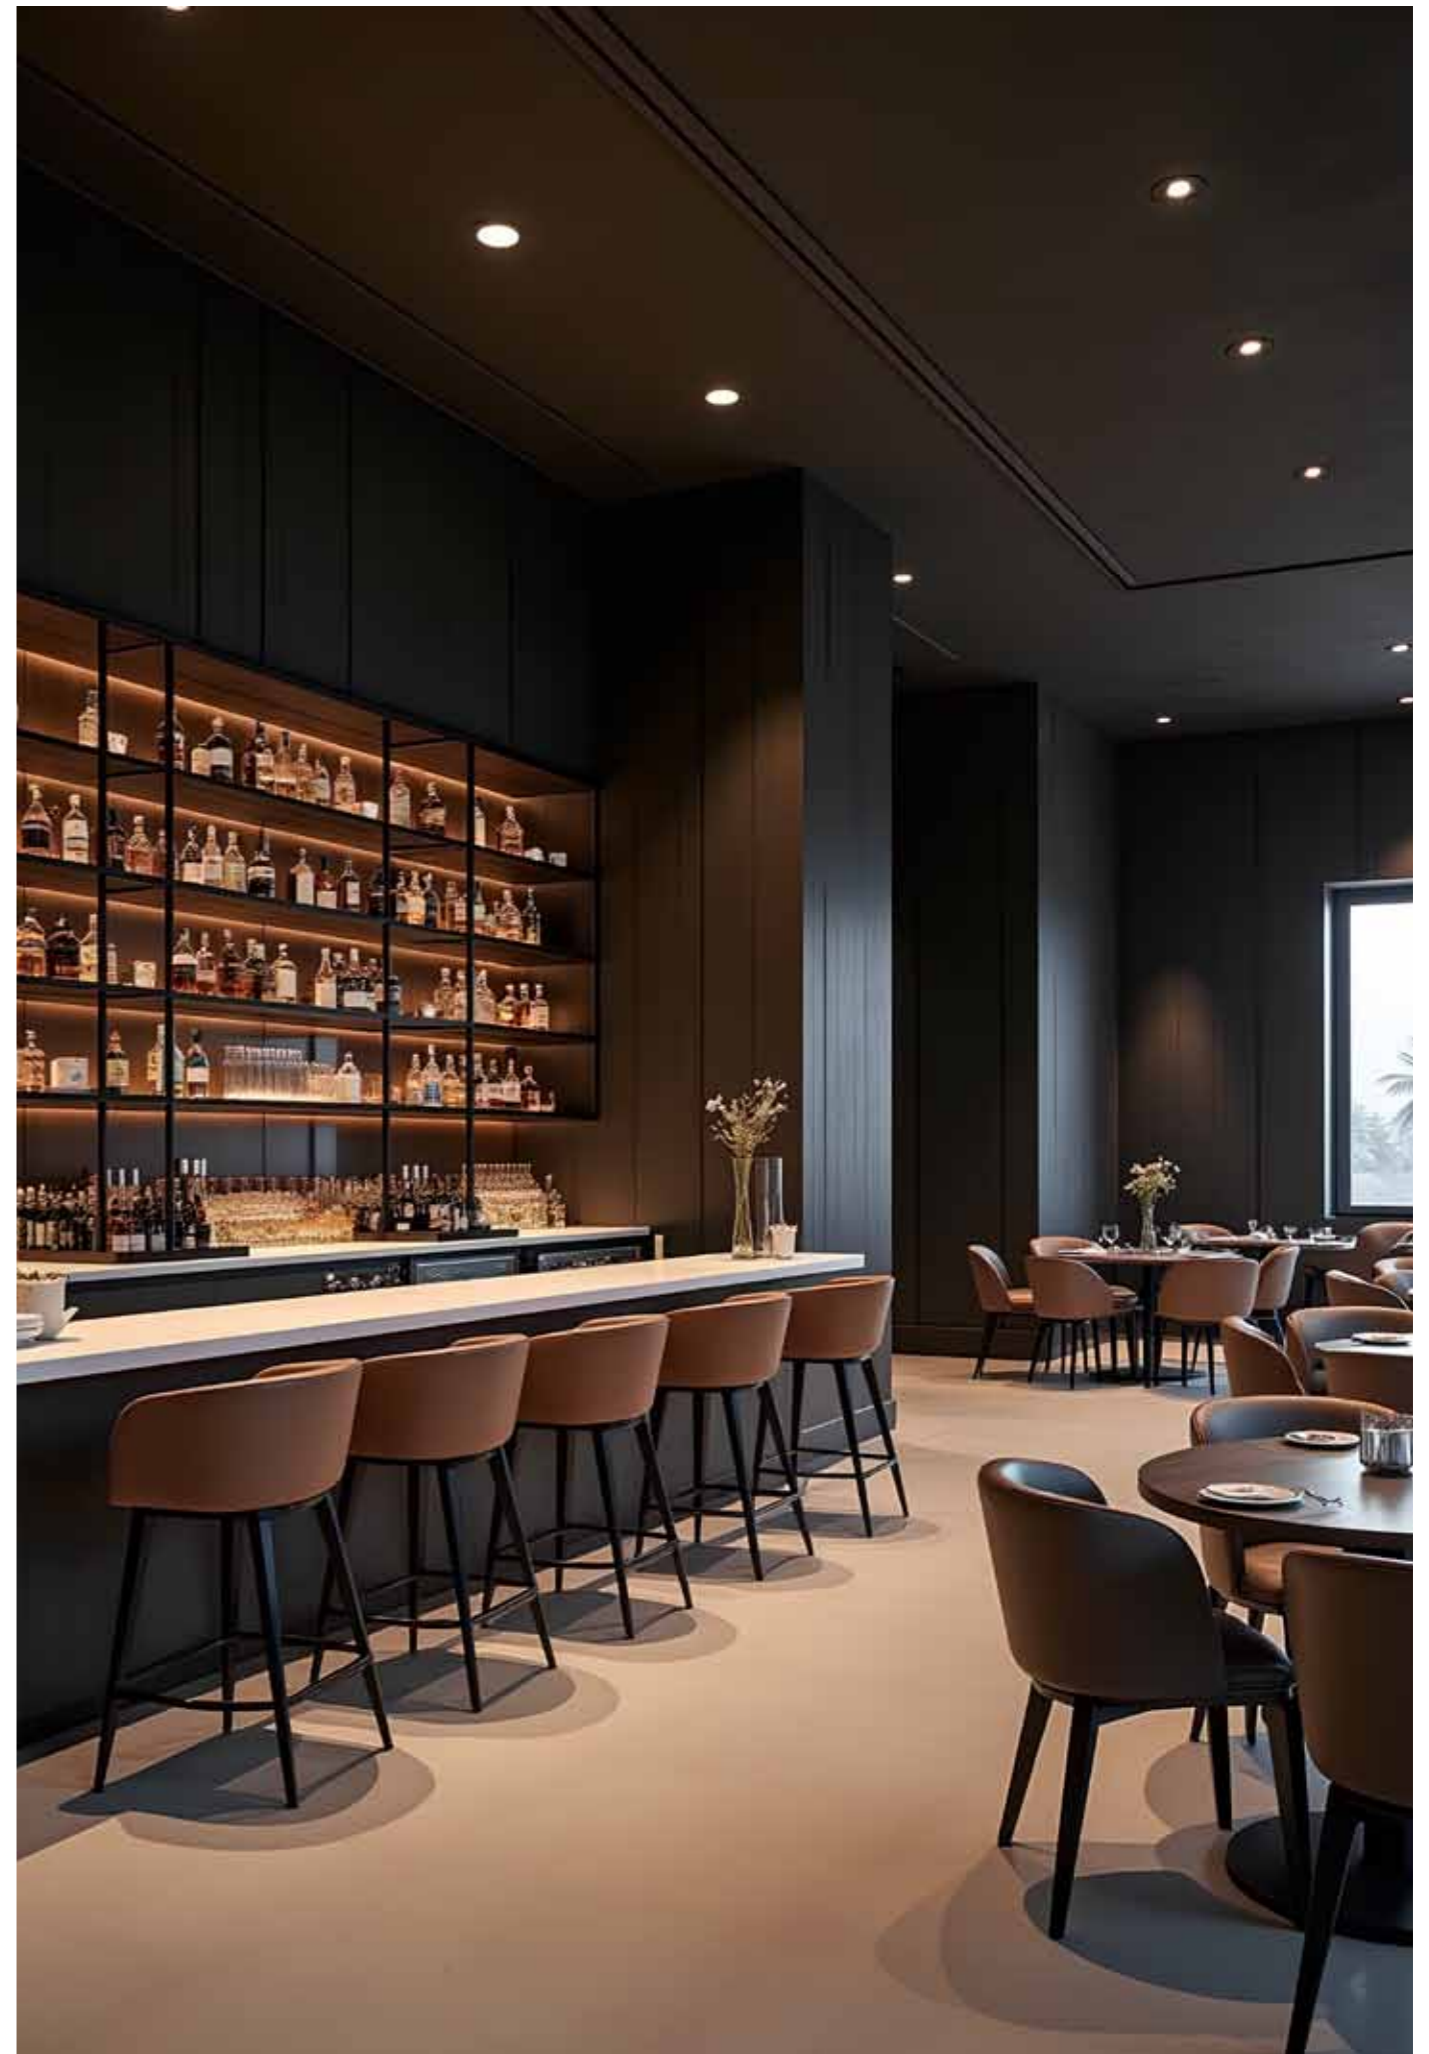

## NUOVE APPLICAZIONI, UNA GAMMA COMPLETA

### NEW MODELS, A COMPLETE RANGE

Una gamma di incassati connotata e completa: NEMO, best seller tra le nostre linee commerciali, viene ampliata con una configurazione per ambienti umidi. Il proiettore è disponibile nelle potenze 10-15-24W in versione IP65. Ottiche, schede led 2700-3000-4000k, riflettori in 7 colori, alimentatori ON OFF, DALI, Push, configurazioni singole e multiple, seguono lo schema collaudato per i modelli già a catalogo. L'apparecchio si completa con alimentazioni IP20 oppure IP65.

A distinctive and complete range of recessed fixtures: NEMO, a best-seller among our commercial lines, is now expanded with a configuration designed for humid environments. The spotlight is available in 10W, 15W, and 24W versions with IP65 protection. Optics, LED boards (2700K-3000K-4000K), reflectors in 7 colors, ON/OFF, DALI, Push, and Triac drivers, as well as single and multiple configurations, follow the proven format of the existing catalog models. The fixture can be completed with either IP20 or IP65 power supplies.

## N E M O \_ I P 6 5

L'unità che contiene il gruppo LED, completamente protetta dall'acqua si integra perfettamente nelle innumerevoli soluzioni disponibili. La profondità di gamma, l'efficienza e l'affidabilità dei nostri sistemi qualificano NEMO come scelta ideale nelle installazioni retail, uffici, ambienti domestici.

The unit housing the LED group is fully protected against water and integrates seamlessly into the countless available solutions. The depth of the range, along with the efficiency and reliability of our systems, makes NEMO the ideal choice for retail installations, offices, and residential environments.






## Trimmed\_Adj-Fix



### Round




Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	1075 lm	75 mm	85 mm	112 mm	0,24 kg	PA-ABAB ■ ▲ ● □ ▼ ⋮
15 W	1510 lm	75 mm	85 mm	112 mm	0,30 kg	PA-ABBC ■ ▲ ● □ ▼ ⋮
24 W	2475 lm	100 mm	112 mm	140 mm	0,55 kg	PA-ACCD ■ ▲ ● □ ▼ ⋮

220÷240Vac  
 IP65down - IP20/IP65 up

UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
 Lumen output values: luminaire luminous flux at 4000 K - optics 24°

### Square Round



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	1075 lm	92 mm	102 mm	127 mm	0,29 kg	PA-BBAB ■ ▲ ● □ ▼ ⋮
15 W	1510 lm	92 mm	102 mm	127 mm	0,35 kg	PA-BBBC ■ ▲ ● □ ▼ ⋮
24 W	2475 lm	125 mm	135 mm	161 mm	0,64 kg	PA-BCCD ■ ▲ ● □ ▼ ⋮

220÷240Vac  
 IP65down - IP20/IP65 up

UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
 Lumen output values: luminaire luminous flux at 4000 K - optics 24°

## Accessories

Description	Minimum Recessing hole	IP	Weight	Code		
				10W	15W	24W
Emergency kit 1 Hour	75 mm	IP20	0,43 kg	DRV9092	DRV9092	DRV9092
Emergency kit 3 Hours	100 mm	IP20	0,88 kg	/	/	DRV9091
Honeycomb grid			0,02 kg	RTL28012	RTL28012	RTL28013


### \* Select your option

Version	Ring color	CCT	Optic	Reflector color	Control
Fix	White	2700 K	15°	Matt Silver	On/Off
Adj	Black	3000 K	24°	Mirror	DALI
		4000 K	38°	Titanium	Push
			55°	Gold	On/Off IP65
				White	DALI IP65
				Matt Black	Push IP65
				Matt Bronze	

## Trimmed\_Comfort



### Round




Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	990 lm	75 mm	85 mm	130 mm	0,20 kg	PA-ABAB ■ ▲ ● □ ▼ ⋮
15 W	1390 lm	75 mm	85 mm	130 mm	0,27 kg	PA-ABBC ■ ▲ ● □ ▼ ⋮
24 W	2280 lm	100 mm	112 mm	165 mm	0,47 kg	PA-ACCD ■ ▲ ● □ ▼ ⋮

220÷240Vac  
 IP65down - IP20/IP65 up

UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3  
 Lumen output values: luminaire luminous flux at 4000 K - optics 24°

### Square Round



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	990 lm	92 mm	102 mm	147 mm	0,25 kg	PA-BBAB ■ ▲ ● □ ▼ ⋮
15 W	1390 lm	92 mm	102 mm	147 mm	0,32 kg	PA-BBBC ■ ▲ ● □ ▼ ⋮
24 W	2280 lm	125 mm	135 mm	185 mm	0,55 kg	PA-BCCD ■ ▲ ● □ ▼ ⋮

220÷240Vac  
 IP65down - IP20/IP65 up

UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3 Valori  
 Lumen output values: luminaire luminous flux at 4000 K - optics 24°

## Accessories

Description	Minimum Recessing hole	IP	Weight	Code		
				10W	15W	24W
Emergency kit 1 Hour	75 mm	IP20	0,43 kg	DRV9092	DRV9092	DRV9092
Emergency kit 3 Hours	100 mm	IP20	0,88 kg	/	/	DRV9091
Honeycomb grid			0,02 kg	RTL28012	RTL28012	RTL28013

### \* Select your option


Version	Ring color	CCT	Optic	Reflector color	Control
Comfort	White	2700 K	15°	White	On/Off
	Black	3000 K	24°	Matt Silver	DALI
		4000 K	38°	Matt Black	Push
			55°	Matt Bronze	On/Off IP65
					DALI IP65
					Push IP65

# NEMO\_RING IP65

## Trimmed\_Comfort



### □ Square Square



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	990 lm	75 mm	85 mm	130 mm	0,21 kg	PA-EBAB ■ ▲ ● ▼ ☐ ☒
15 W	1390 lm	75 mm	85 mm	130 mm	0,27 kg	PA-EBBC ■ ▲ ● ▼ ☐ ☒
24 W	2280 lm	100 mm	112 mm	165 mm	0,49 kg	PA-ECCD ■ ▲ ● ▼ ☐ ☒


☐ 220÷240Vac IP65down - IP20/IP65 up UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3 Lumen output values: luminaire luminous flux at 4000 K - optics 24°

# NEMO\_SIMPLE IP65

## Trimmed\_Fix




### ○ Round



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	1020 lm	75 mm	84 mm	117 mm	0,21 kg	RA-ABAB ■ ▲ ● ▼ ☐ ☒
15 W	1435 lm	75 mm	84 mm	117 mm	0,28 kg	RA-ABBC ■ ▲ ● ▼ ☐ ☒
24 W	2350 lm	100 mm	110 mm	146 mm	0,49 kg	RA-ACCD ■ ▲ ● ▼ ☐ ☒

☐ 220÷240Vac IP65down - IP20/IP65 up UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3 Lumen output values: luminaire luminous flux at 4000 K - optics 24°

### □ Square



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	1020 lm	75 mm	88 mm	102 mm	0,23 kg	RA-BBAB ■ ▲ ● ▼ ☐ ☒
15 W	1435 lm	75 mm	88 mm	102 mm	0,30 kg	RA-BBBC ■ ▲ ● ▼ ☐ ☒

☐ 220÷240Vac IP65down - IP20/IP65 up UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3 Lumen output values: luminaire luminous flux at 4000 K - optics 24°

## Accessories

Description	Minimum Recessing hole	IP	Weight	Code		
				10W	15W	24W
Emergency kit 1 Hour	75 mm	IP20	0,43 kg	DRV9092	DRV9092	DRV9092
Emergency kit 3 Hours	100 mm	IP20	0,88 kg	/	/	DRV9091
Honeycomb grid			0,02 kg	RTL28012	RTL28012	RTL28013

### \* Select your option

Version	Ring color	CCT	Optic	Reflector color	Control
Comfort	White	2700 K	15°	White	On/Off
	Black	3000 K	24°	Matt Silver	DALI
		4000 K	38°	Matt Black	Push
			55°	Matt Bronze	On/Off IP65
				DALI IP65	NP
				Push IP65	DP
					PP

## Accessories

Description	Minimum Recessing hole	IP	Weight	Code		
				10W	15W	24W
Emergency kit 1 Hour	75 mm	IP20	0,43 kg	DRV9092	DRV9092	DRV9092
Emergency kit 3 Hours	100 mm	IP20	0,88 kg	/	/	DRV9091
Honeycomb grid			0,02 kg	RTL28012	RTL28012	RTL28013


### \* Select your option

Version	Ring color	CCT	Optic	Control
Fix	White	2700 K	15°	On/Off
	Black	3000 K	24°	DALI
		4000 K	38°	Push
			55°	On/Off IP65
			DALI IP65	NP
			Push IP65	DP
				PP

### Trimless\_Adj-Fix




#### Round



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	1075 lm	78 mm	110 mm	89 mm	0,24 kg	<b>PB-ABAB</b> ■ ▲ ● □ ▼ ⚡
15 W	1510 lm	78 mm	110 mm	112 mm	0,31 kg	<b>PB-ABBC</b> ■ ▲ ● □ ▼ ⚡
24 W	2475 lm	103 mm	150 mm	140 mm	0,55 kg	<b>PB-ACCD</b> ■ ▲ ● □ ▼ ⚡

□ 220÷240Vac IP65down - IP20/IP65 up UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3 Lumen output values: luminaire luminous flux at 4000 K - optics 24°

#### Square



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	1075 lm	85 mm	120 mm	104 mm	0,28 kg	<b>PB-BBAB</b> ■ ▲ ● □ ▼ ⚡
15 W	1510 lm	85 mm	120 mm	127 mm	0,34 kg	<b>PB-BBBC</b> ■ ▲ ● □ ▼ ⚡

□ 220÷240Vac IP65down - IP20/IP65 up UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3 Lumen output values: luminaire luminous flux at 4000 K - optics 24°

### Accessories

Description	Minimum Recessing hole	IP	Weight	Code		
				10W	15W	24W
Emergency kit 1 Hour	75 mm	IP20	0,43 kg	<b>DRV9092</b>	<b>DRV9092</b>	<b>DRV9092</b>
Emergency kit 3 Hours	100 mm	IP20	0,88 kg	/	/	<b>DRV9091</b>
Honeycomb grid			0,02 kg	<b>RTL28012</b>	<b>RTL28012</b>	<b>RTL28013</b>


\* Select your option

Version	Ring color	CCT	Optic	Reflector color	Control						
Fix	A	White	W	2700 K	1	15°	1	Matt Silver	A	On/Off	NF
Adj	B	3000 K	2	24°	2	Mirror	B	DALI	B	DALI	DA
		4000 K	3	38°	3	Titanium	C	Push	PU	Push	PU
			4	55°	4	Gold	D	On/Off IP65	NP	On/Off IP65	NP
						White	E	DALI IP65	DP	DALI IP65	DP
						Matt Black	G	Push IP65	PP	Push IP65	PP
						Matt Bronze	H				

### Trimless\_Comfort




#### Round



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	990 lm	78 mm	110 mm	107 mm	0,21 kg	<b>PB-ABAB</b> ■ ▲ ● □ ▼ ⚡
15 W	1390 lm	78 mm	110 mm	130 mm	0,28 kg	<b>PB-ABBC</b> ■ ▲ ● □ ▼ ⚡
24 W	2280 lm	103 mm	150 mm	165 mm	0,47 kg	<b>PB-ACCD</b> ■ ▲ ● □ ▼ ⚡

□ 220÷240Vac IP65down - IP20/IP65 up UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3 Lumen output values: luminaire luminous flux at 4000 K - optics 24°

#### Square



Power	Lumen output	Hole size	Product dimension		Weight	*code to complete
			A	B		
10 W	990 lm	85 mm	120 mm	128 mm	0,24 kg	<b>PB-BBAB</b> ■ ▲ ● □ ▼ ⚡
15 W	1390 lm	85 mm	120 mm	150 mm	0,31 kg	<b>PB-BBBC</b> ■ ▲ ● □ ▼ ⚡

□ 220÷240Vac IP65down - IP20/IP65 up UP to 100 lm/W | UP to UGR<17 | L80/B20 50.000 h. | CRI>90 | RG1 | SDCM<3 Lumen output values: luminaire luminous flux at 4000 K - optics 24°

### Accessories

Description	Minimum Recessing hole	IP	Weight	Code		
				10W	15W	24W
Emergency kit 1 Hour	75 mm	IP20	0,43 kg	<b>DRV9092</b>	<b>DRV9092</b>	<b>DRV9092</b>
Emergency kit 3 Hours	100 mm	IP20	0,88 kg	/	/	<b>DRV9091</b>
Honeycomb grid			0,02 kg	<b>RTL28012</b>	<b>RTL28012</b>	<b>RTL28013</b>

\* Select your option

Version	Ring color	CCT	Optic	Reflector color	Control						
Comfort	C	White	W	2700 K	1	15°	1	White	E	On/Off	NF
		3000 K	2	24°	2	Matt Silver	F	DALI	F	DALI	DA
		4000 K	3	38°	3	Matt Black	G	Push	G	Push	PU
			4	55°	4	Matt Bronze	H	On/Off IP65	NP	On/Off IP65	NP
								DALI IP65	DP	DALI IP65	DP
								Push IP65	PP	Push IP65	PP